

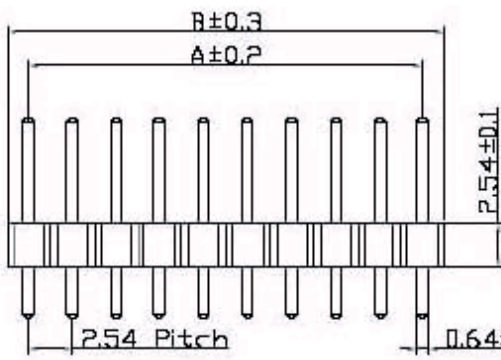


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

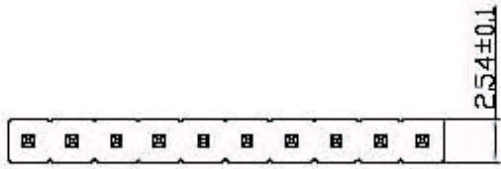


$A = 2.54 * (\text{No of Space})$   
 $B = A + 2.54$



**SPECIFICATIONS**  
 Current Rating: 3 Arms  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230° for 30-60 seconds  
 (260° for 10 seconds)

**MATERIAL&FINISH**  
 Contact: Brass  
 Insulator Material: PBT  
 Color: Black  
 Finish: Gold Flash Plated Over Nickel

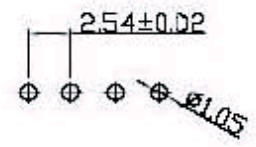

P.C.Board Layout

**T&T** Connection System Co., Ltd.

UNIT		SCALE	PART NAME	
MM		2:1	2.54 Pin Header Single Row Straight Type(C=6.0 D=3.0)	

制表日:2003/07/15	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	JEFFREY				± 0.3	PHSS-xx-6/3	A

1 2 3 4 5 6 7 8